TENDER SUBMISSION · REF. ARI-T-2611 · 3 NOVEMBER 2026

Cat B fit-out, levels 4–5 for Pellwyn Harcourt LLP

Our priced tender for the 1,300 m² Cat B fit-out, with programme to practical completion on 14 May 2027, preliminaries, provisional sums and the qualifications behind the price.

TENDER SUM (EXCL. VAT)
£1,451,130
£1,116 per m² NIA · validity 60 days

CONTRACT PERIOD
17 weeks
Start on site 18 Jan 2027 · PC 14 May 2027

Project	Cat B office fit-out, levels 4 and 5
Address	22 Calloway Street, London EC2 (fictional)
Area	1,300 m² NIA across two floors
Tender documents	Designer's drawings rev. C, specification and pricing schedule, 9 Oct 2026
Form of contract	JCT Minor Works Building Contract 2016, as amended
Practical completion	Friday 14 May 2027

Submitted to
Project Manager, for Pellwyn Harcourt LLP

Submitted by
Bid Director, Ashcombe Rook Interiors Ltd

BUILT FROM
"Pellwyn Harcourt LLP is fitting out levels 4 and 5 of 22 Calloway Street, London EC2 — about 1,300 m² NIA, Cat A complete. Tender pack attached: designer's drawings, specification and pricing schedule. Practical completion needed by May 2027. Return your priced tender with programme and qualifications."

→ this proposal in one working day

01 · SCOPE AND APPROACH

Our understanding of the works

The building is delivered to Cat A: raised floor, suspended ceiling, LED lighting, four-pipe fan coils and a fire alarm system. Our works adapt it to the designer's Cat B layout across both floors.

Level 4 · client and meeting floor

- Reception with feature desk, waiting lounge and glazed client suite of five meeting rooms.
- Main tea point and breakout with banquette seating and joinery.
- Two quiet rooms, wellbeing room and a comms room with dedicated cooling.

Level 5 · workplace floor

- Open-plan desks for 96, with lockers and two focus booths.
- Six partner offices with glazed fronts, two team rooms and a satellite tea point.

Services adaptations

- Re-position and add fan coil units to suit cellular rooms; extract to tea points.
- Re-circuit lighting with presence detection; feature lighting under PS2.
- Floor boxes to desks and meeting rooms; containment for the client's IT supplier.
- Fire alarm detection and sounders adapted to the new room layout.

How we will run it

- Full-time site manager and a contracts manager visiting twice weekly.
- Logistics agreed with building management: goods lift booking, loading bay slots, noisy works before 08:00 and after 18:00 under PS3.
- Considerate Constructors registration; weekly progress report to the project manager.

02 · TENDER SUMMARY

Tender sum by element

Priced against the pricing schedule issued with the tender pack. Illustrative GBP figures. VAT is excluded and charged at the prevailing rate.

ITEM	ELEMENT	AMOUNT
1	Strip-out of Cat A finishes where affected	£38,500
2	Partitions, drylining and acoustic upgrades	£142,000
3	Glazed partitions and glazed doors	£126,000
4	Internal doors and ironmongery	£64,800
5	Ceiling modifications, rafts and bulkheads	£72,400
6	Floor finishes (carpet tile, LVT, entrance matting)	£118,600
7	Joinery (reception desk, tea points, lockers, booths)	£164,000
8	Decorations and wall finishes	£46,200
9	Mechanical adaptations (FCUs, extract, controls)	£152,000
10	Electrical adaptations (lighting, small power, floor boxes)	£138,500
11	Fire alarm and life-safety adaptations	£28,700
12	Data containment (cabling by client's IT supplier)	£22,400
13	Builder's work in connection with services	£18,600
14	Signage and glazing manifestation	£9,800
	Measured works subtotal	**£1,142,500**
	Preliminaries (17 weeks on site plus lead-in; see section 03)	£168,000
	Overheads and profit (6% on preliminaries and works)	£78,630
	Provisional sums (see section 03)	£62,000
	Tender sum, excluding VAT	**£1,451,130**
	Rate per m² NIA (1,300 m²)	£1,116

The fully priced pricing schedule is available to the project manager on request.

03 · PRELIMINARIES AND PROVISIONAL SUMS

Preliminaries

ITEM	AMOUNT
Site management (site manager full-time, contracts manager part-time)	£78,400
Site set-up, welfare, hoarding and floor protection	£18,600
Waste management and skips (90% diversion from landfill)	£16,800
Goods lift operation, logistics and loading bay management	£14,200
Health and safety, CDM compliance, fire safety during works	£11,500
Insurances (contractor's all risks, employer's and public liability)	£12,300
Final clean, O&M manuals, as-built drawings	£16,200
Preliminaries total	**£168,000**

Provisional sums


Included at the values below, inclusive of overheads and profit, and adjusted against actual cost under the contract.

REF.	DESCRIPTION	AMOUNT
PS1	Landlord's surveyor, licence for alterations and approval fees	£12,000
PS2	Feature lighting to reception and client suite	£25,000
PS3	Out-of-hours working required by building management	£15,000
PS4	Making good to Cat A defects found after strip-out	£10,000
	Provisional sums total	**£62,000**

04 · PROGRAMME

17 weeks on site to practical completion

Lead-in from contract award on 4 December 2026. Start on site 18 January 2027. Practical completion Friday 14 May 2027.

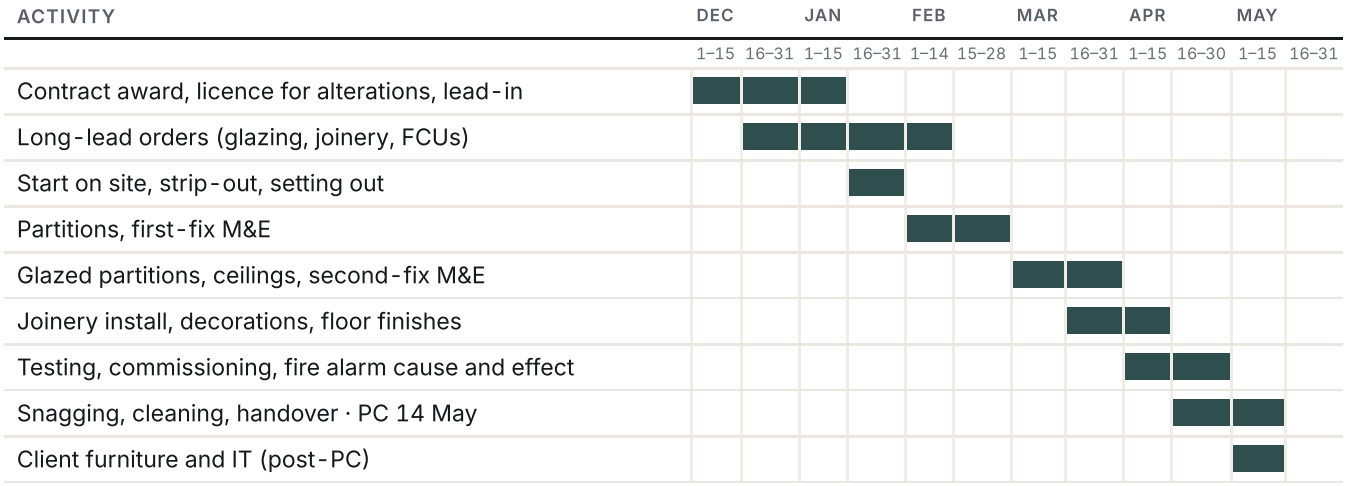

Key dates. Award 4 Dec · licence for alterations 15 Jan · start on site 18 Jan · PC 14 May.

Critical path. Glazed partition manufacture (10 weeks) and FCU delivery; ordered on award.

Sequence. Level 5 first, then level 4, so the client suite is finished last and snagged clean.

05 · QUALIFICATIONS AND EXCLUSIONS

Qualifications

1. Our tender is based on the documents listed on the cover. Design development after the tender date is valued as a variation.
2. The Cat A installation is complete, commissioned and in working order on start on site. Defects in the landlord's works are dealt with under PS4.
3. Fan coil units are re-used where shown; the number of new units is limited to the 14 shown on the mechanical layouts.
4. Normal working hours are 08:00–18:00 Monday to Friday. Weekend and out-of-hours work is covered by PS3 only.
5. The goods lift and loading bay are available for our use for at least 4 hours each working day.
6. Loose furniture, AV and IT are by the client, installed after practical completion as shown on the programme.
7. No allowance for asbestos: the building is a recent Cat A shell with a clear refurbishment survey.

Exclusions

- VAT
- Loose furniture, AV equipment and IT cabling
- Landlord's legal costs and service charge during the works
- Planning or building regulations fees beyond PS1
- Works to landlord areas, risers, toilets and the roof
- Specialist acoustic testing beyond one test per room type
- Liquidated damages above 5% of the contract sum in total

06 · TENDER VALIDITY AND TERMS

Commercial terms

- **Tender validity.** 60 days from the return date of 3 November 2026.
- **Contract.** JCT Minor Works Building Contract 2016 with the amendments in the tender pack, save for the qualifications in section 05.
- **Payment.** Monthly valuations; payment 14 days from the due date. Retention 3%, half released at practical completion and half at the end of the 12-month rectification period.
- **Liquidated damages.** Accepted at £2,500 per week, capped at 5% of the contract sum.
- **Insurance.** Contractor's all risks to full reinstatement value of the works; employer's liability £10m; public liability £10m.
- **Accreditations.** Considerate Constructors registered; site manager SMSTS-trained; all operatives hold CSCS cards.

FORM OF TENDER

We offer to carry out and complete the works described in the tender documents for the sum of **£1,451,130** excluding VAT, subject to the qualifications above, and to achieve practical completion by 14 May 2027.

For Ashcombe Rook Interiors Ltd · name, position

Accepted for Pellwyn Harcourt LLP · name, position

Signature · date

Signature · date